

specialty lighting reserves the right to make changes without prior notice. (03.24.2025)
 Aluminum body with end caps and attachment clips. diameter 5/8" . Adjustable 15° steps ±45 ° in both directions

Tube6
 Tube 6 5/8 diam

Tube6 -

Output

- 27 - 2700 K 418 lm/ft 4.45 w/f
- 30 - 3000 K 418 lm/ft 4.45 w/f
- 35 - 3500 K 437 lm/ft 4.45 w/f
- 40 - 4000 K 448 lm/ft 4.45 w/f
- CRI 90

Finish

- AL - Aluminum Finish
- WH - White
- BK - Black
- CU - Custom Color
- Specify RAL color

Runs


- A - 1' nominal module 12"
- Use for not even number in runs
- B - 2' nominal module 24"
- C - 3' nominal module 36"
- D - 4' nominal module 48"
- E - 5' nominal module 60"
- F - 6' nominal module 72"
- G - 7' nominal module 84"
- H - 8' nominal module 96"
- Total Run: (0 ft 0 in)

Emergency


- 00 - No Emergency
- EM - Emergency

Notes:

Specialty Lighting architectural will generate submittals when having runs end caps and clips (installation, minimal 18" OC) by runs.

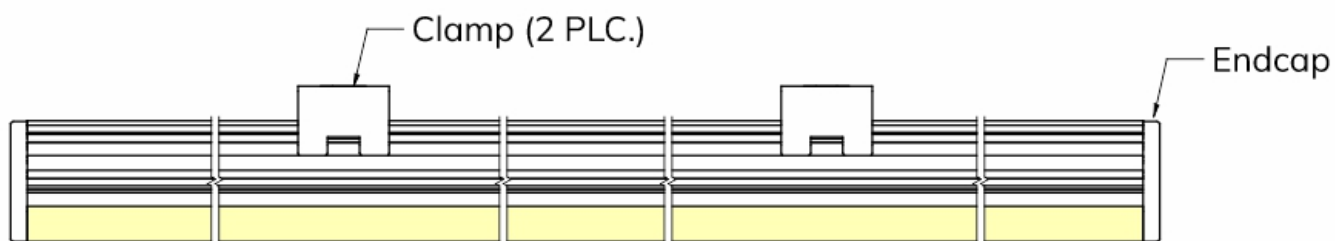

Front view

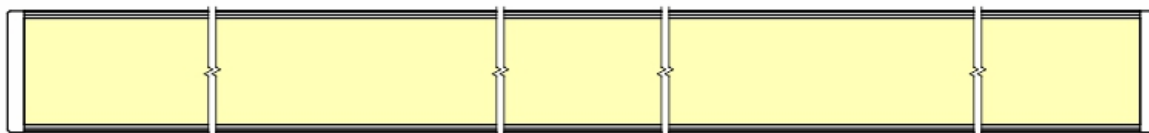

Bottom view

Driver Boxes

